

BL-5000EXT

Extended Length Portable Car Lift System

The BL-5000EXT portable car lift has been redesigned to accommodate vehicles with longer wheelbases. We've increased the overall frame length and lift point spread. As a result, the minimum lift point spread is now longer, as well. Our new portable car lift design better accommodates longer wheelbases and extended lift point spreads.

Complete package includes; (2) ea. jack frame assemblies, (2) ea. 150" hydraulic hoses, (2) ea. 14" aux. hoses, (2) ea. quick-mount handles, (4) ea. 2" x 3" x 4" rubber lifting blocks, (4) ea. 3" x 3" x 4" rubber lifting blocks, (1) mini hydraulic power unit with pendant control.

Notable design features...

- 5,000-pound lifting capacity
- Extended length frames and lifting point spread
- From stow to go in less than 60-seconds
- Dual-position safety locks engage automatically as the lift rises
- Dual locking positions – mid level and full rise
- Extended, cantilevered rubber block trays provide increased rubber block reach
- Portable power unit features a remote push-button control for simple operation
- Steel mounted urethane wheels provide effortless rolling of jack frames on floor
- Remote pendant control features a 13-foot cord
- Power unit features a built-in hydraulic flow divider for precise equalized lifting
- Open-center design for clear under car access
- Quick-connect/disconnect hoses for fast and convenient set-up
- Convenient handles allow for easy positioning of the jack frames
- Strong 14-gauge welded steel frames
- Hydraulic cylinders feature integrated velocity-fuse safety valves
- Includes an eight piece set of adjustable and stackable rubber lift blocks
- Durable powder coat finish




What's the difference between SLX and EXT?

- SLX minimum lift point spread: 29.5" (749 mm)
- **EXT minimum lift point spread: 37.4" (951 mm)**

- SLX maximum lift point spread: 60" (1524 mm)
- **EXT maximum lift point spread: 66" (1676 mm)**

- SLX overall frame length: 70" (1778 mm) (5000 model only)
- **EXT overall frame length: 75" (1905 mm) (5000 model only)**



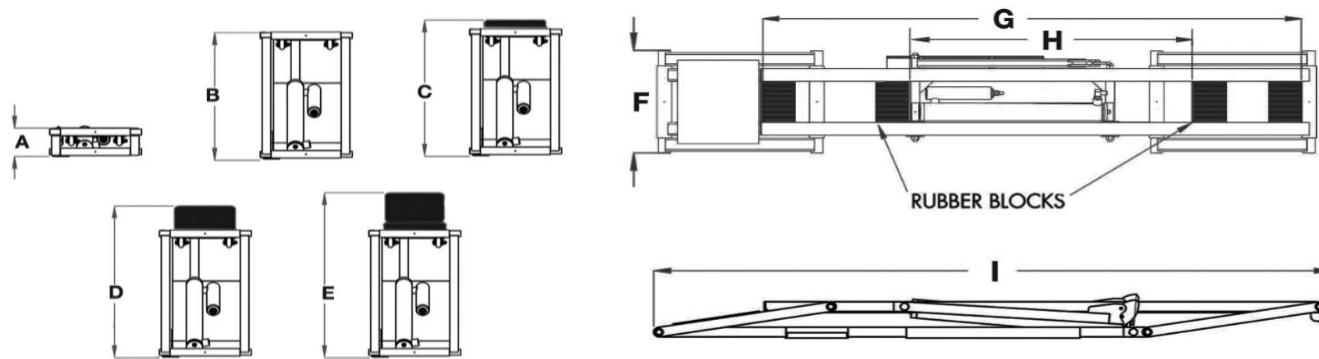

QuickJack™ Specification Comparison

Specifications are subject to change without notice. Prices may not reflect current promotions.

| MODEL | BL-3500SLX | BL-5000SLX | BL-5000EXT | BL-7000SLX | BL-7000EXT |
|-------------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| LIFTING CAPACITY | 3,500 lbs. / 1,588 kg. | 5,000 lbs. / 2,268 kg. | 5,000 lbs. / 2,268 kg. | 7,000 lbs. / 3,175 kg. | 7,000 lbs. / 3,175 kg. |
| (A) COLLAPSED HEIGHT | 3" / 76 mm. | 3" / 76 mm. | 3" / 76 mm. | 3.6" / 91 mm. | 3.6" / 91 mm. |
| (B) LIFTING HEIGHT (FRAME ONLY) | 16.5" / 419 mm. | 17.6" / 447 mm. | 17.6" / 447 mm. | 18.2" / 462 mm. | 18.2" / 462 mm. |
| (C) LIFTING HEIGHT (SMALL BLOCK) | 17" / 432 mm. | 18.4" / 467 mm. | 18.4" / 467 mm. | 18.6" / 471 mm. | 18.6" / 471 mm. |
| (D) LIFTING HEIGHT (TALL BLOCK) | 18.5" / 470 mm. | 19.2" / 487 mm. | 19.2" / 487 mm. | 19.4" / 493 mm. | 19.4" / 493 mm. |
| (E) LIFTING HEIGHT (STACKED BLOCKS) | 20" / 508 mm. | 21.3" / 542 mm. | 21.3" / 542 mm. | 21.6" / 548 mm. | 21.6" / 548 mm. |
| (F) FRAME WIDTH | 10.55" / 268 mm. | 11" / 278 mm. | 11" / 278 mm. | 12.5" / 318 mm. | 12.5" / 318 mm. |
| (G) MAX LIFTING POINT SPREAD | 50.5" / 1,283 mm. | 60" / 1,524 mm. | 66" / 1,676 mm. | 60" / 1,524 mm. | 66" / 1,676 mm. |
| (H) MIN LIFTING POINT SPREAD | 26.7" / 678 mm. | 29.5" / 749 mm. | 37.4" / 951 mm. | 29.5" / 749 mm. | 37.4" / 951 mm. |
| (I) OVERALL FRAME LENGTH | 62" / 1,575 mm. | 70" / 1,778 mm. | 75" / 1,905 mm. | 71" / 1,803 mm. | 76" / 1,930 mm. |
| INDIVIDUAL FRAME WEIGHT | 60 lbs. / 27 kg. | 76 lbs. / 35 kg. | 80 lbs. / 36 kg. | 96 lbs. / 44 kg. | 101 lbs. / 46 kg. |
| SHIPPING WEIGHT | 180 lbs. / 82 kg. | 212 lbs. / 96 kg. | 220 lbs. / 100 kg. | 242 lbs. / 110 kg. | 262 lbs. / 119 kg. |