



Overall Frame Length

BL-3500SLX: 62"
 BL-5000SLX: 72.5"
 BL-7000SLX: 72.5"



Use table below to list your vehicles. Compare QuickJack models by viewing separate worksheets.


Vehicle Make	Vehicle Model	Vehicle Year	Gross Vehicle Weight	(A) Jacking Point Span-MAX Use For Rubber Block Placement	(B) Jacking Point Span-MIN Use For Rubber Block Placement	(C) Tire Tread Span	(D) Allowable Permissible Length

QUICKJACK™



PATENTED

UPPER LOCK POSITION

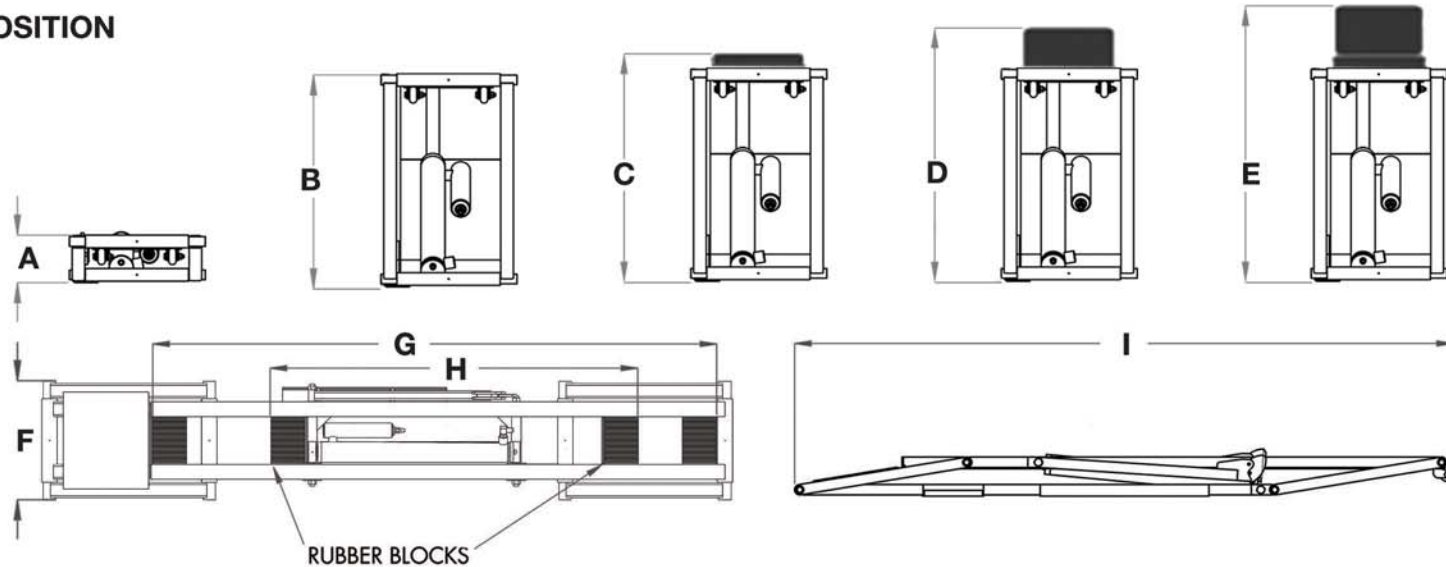

*The design, material and specifications are subject to change without notice.

MODEL	BL-3500SLX/ALX	BL-5000SLX/ALX	BL-7000SLX/ALX
Lifting capacity per pair	3,500 lbs. / 1588 kg.	5,000 lbs. / 2268 kg.	7,000 lbs. / 3175 kg.
(A) Minimum collapsed height	3" / 76 mm.	3" / 76 mm.	3.5" / 89 mm.
(B) Platform lifting height (Frame only)	16.5" / 419 mm.	17.3" / 439 mm.	18.2" / 462 mm.
(C) Platform lifting height (with small rubber block)	17" / 432 mm.	18" / 457 mm.	18.5" / 469 mm.
(D) Platform lifting height (with tall rubber block)	18.5" / 470 mm.	19" / 483 mm.	19.5" / 495 mm.
(E) Platform lifting height (with stacked rubber blocks)	20" / 508 mm.	21" / 533 mm.	21.5" / 546 mm.
(F) Frame width	10.55" / 268 mm.	11" / 278 mm.	12.5" / 318 mm.
(G) Rubber lift block position - max. spread	50.5" / 1283 mm.	60" / 1524 mm.	60" / 1524 mm.
(H) Rubber lift block position - min. spread	26.7" / 678 mm.	31.5" / 800 mm.	31.5" / 800 mm.
(I) Overall frame length	62" / 1575 mm.	72.5" / 1841 mm.	72.5" / 1841 mm.
Individual jack frame - net weight (ea.)	60 lbs. / 27 kg.	76 lbs. / 34 kg.	91 lbs. / 41 kg.
Power unit/carrier complete - net weight	35 lbs. / 16 kg.	35 lbs. / 16 kg.	35 lbs. / 16 kg.
Gross weight	180	212	242
Noise emission	<45dBA	<45dBA	<45dBA